


Highlights

- 32 key free programming
- Two-color LED intelligent feedback
- 96-key extreme expansion



Specifications

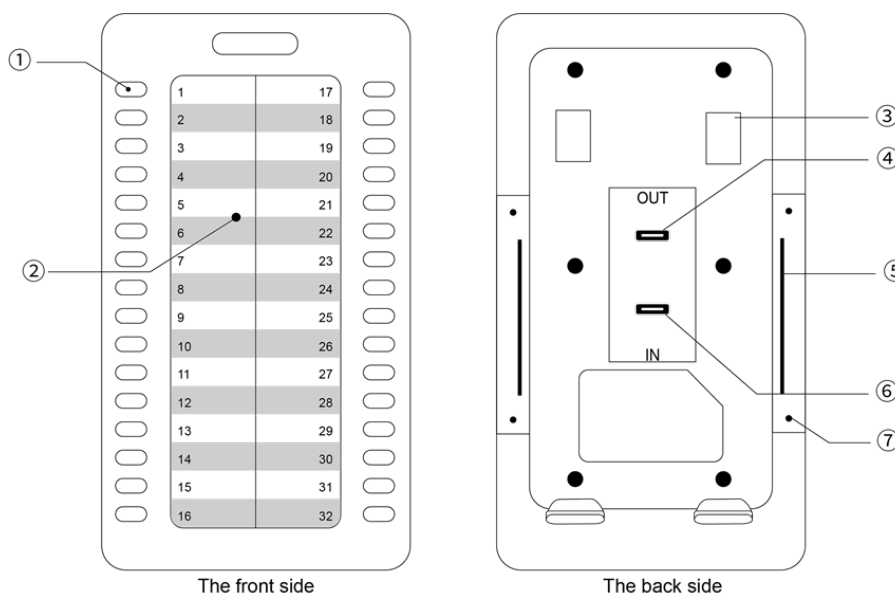

| Serial No. | Name | Clarification |
|------------|---------------------|--|
| 1 | Programmable keys | It can be used to bind a speed dial number for speed dialing. It can be used to set certain function codes to work with the SIP Server to realize the function. When BLF* (Busy Line Detection) is turned on, you can check the busy and idle status of the corresponding number) Red color is always on: the remote line is talking.2) Flashing red: Incoming call on remote line.3) Yellow-green color is always on: Remote line idle. Sequential programming of programmable keys: Left side from top to bottom: 1 to 16.Right side from top to bottom: 17 to 32. |
| 2 | Extension table jam | Provides user speed dial numbers and function keys set up for easy access. |
| 3 | Bracket slot | Used to secure the extension table bracket. |
| 4 | OUT port | Used for connecting to the IN port of the down linked expansion unit. |
| 5 | Metal fastener slot | Metal fastener insertion position. |
| 6 | IN port | Used to connect to the OUT port of a phone or a expansion station. |
| 7 | Metal screw hole | Screw holes for mounting metal fasteners. |
| Parameters | | 32 programmable function keys / Two-color LED light / 32 handwritten panel card stock Speed dial, call transfer, call waiting / Answer, BLF, DND / 1x Type-C (IN) / 1x Type-C (OUT) Maximum support for 3 unit connect / Maintain data on the Web page / Only powered by Type-C Operating Temp: 0~60°C / Operating humidity: 10%~90% Size: 174mm x 100mm x 35mm / Weight: 0.25Kg |